



BOROUGH OF BERGENFIELD

198 NORTH WASHINGTON AVENUE
BERGENFIELD, NEW JERSEY 07621

CONSTRUCTION CODE DEPT.

(201) 387-4055 Ext. 4092

FAX: (201) 385-7376

POOL MEMORANDUM

To: Bergenfield Residents/ Pool Applicants

From: Building Department


Date: February 2000

Items needed for swimming pool applications:

- 1) specifications on pool filter and motor
- 2) Survey of property with locations of pool drawn on it
- 3) fence detail with self closing gate- 54" latch off ground
- 4) pool alarm if required
- 5) electrical detail, locations, etc.
- 6) pools must be located 10' from the property line
- 7) Cost of job
- 8) pool contractor information


ABOVE GROUND POOL
OR PERMANENTLY INSTALLED POOL
AS REQUIRED BY NEC '93

INSPECTION NEEDED BEFORE COVERING
TRENCH. (CALL 487-5373).

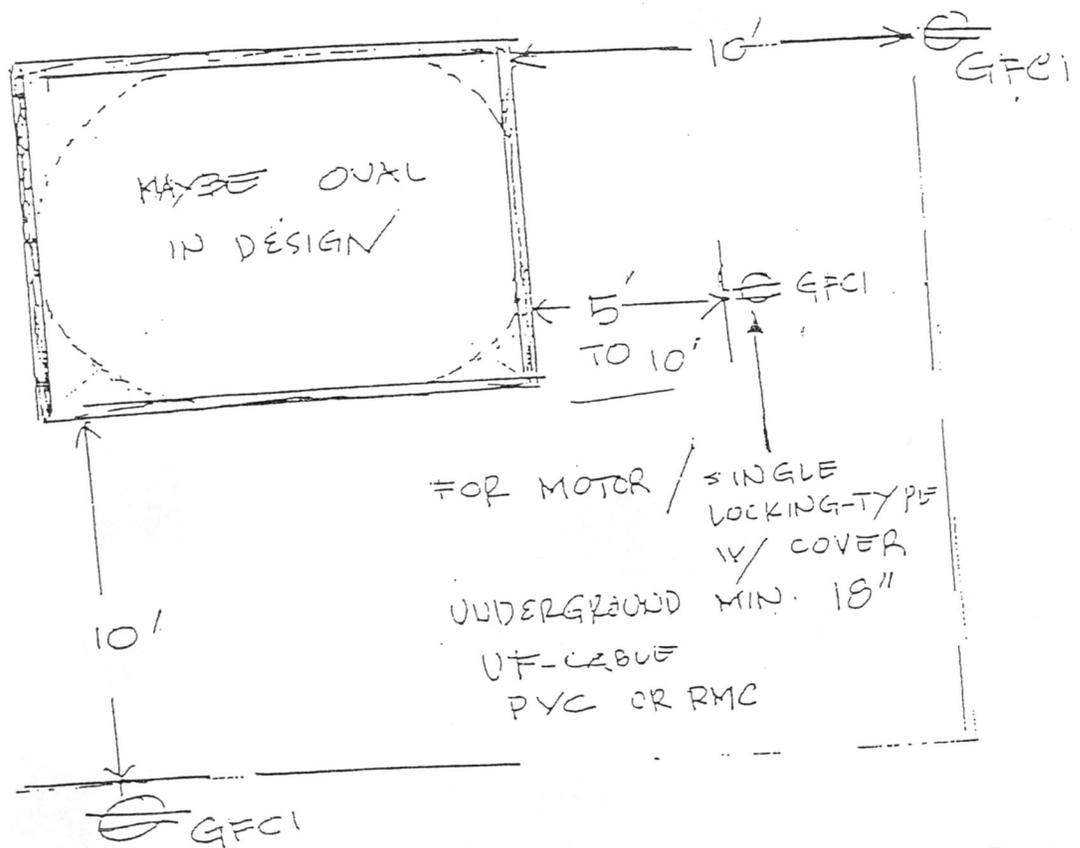


- NOTE:
- ① MANDATORY TO INSTALL 1 GFCI-PROTECTED RECEPTACLE W/IN 10' TO 20' FROM THE POOL WALL.
 - ② LIGHTS, HEATER, ^{BONDING} REFER TO NATIONAL ELEC. CODE ART. 680,
 - ③ PORTABLE POOL - 18FT. X 42 IN.
NO BONDING. PUMP - DOUBLE INSULATION.
RECEPTACLE - 10 FT. FROM POOL.

ILLUSTRATED CHANGES OF THE 1987 NEC[®] / 1993

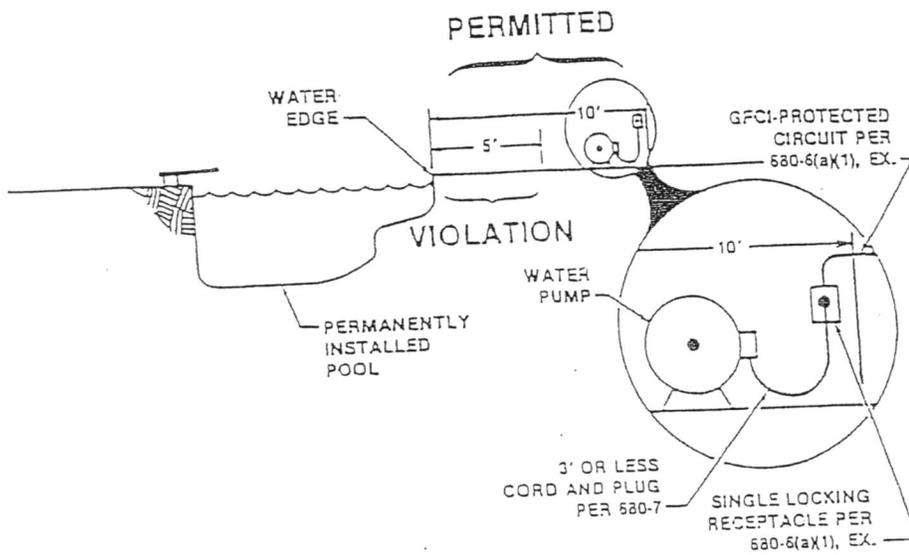

SWIMMING POOLS, FOUNTAINS,
AND SIMILAR INSTALLATIONS
680-6(a)(1), Ex.
REVISION

This revision changes *recirculating pump motors* to *water-pump motors*. Motors installed between 5' and 10' from the water edge of the pool must be connected to a single locking device and the circuit must be GFCI-protected.

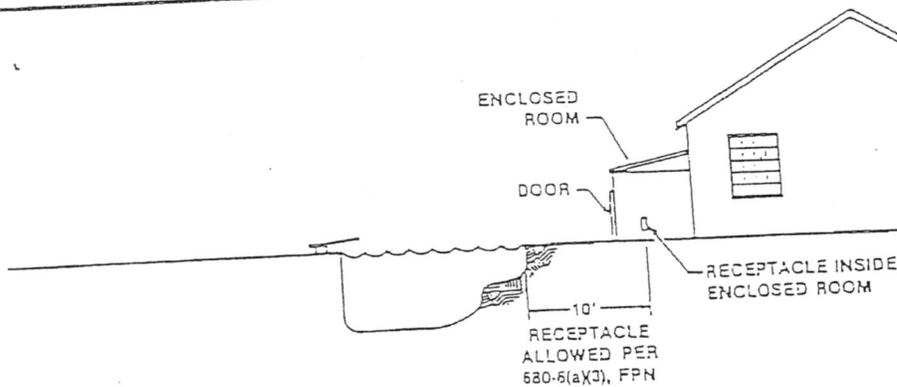

SWIMMING POOLS, FOUNTAINS,
AND SIMILAR INSTALLATIONS
**680-6(a)(3),
FPN**
REVISION

This revision allows receptacles located behind walls with hinged or sliding doors, windows, or other effective barriers to be within 10' of the pool.

STON POOL + SPA
309-764-1500



\$59.95/KIT

OR ALARM

oolguard™

PBM INDUSTRIES, INC.

MEMBER

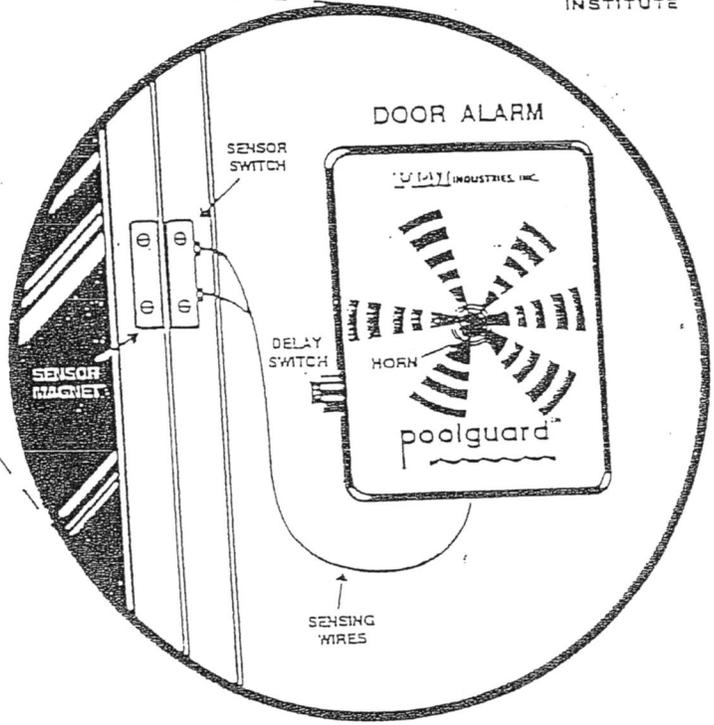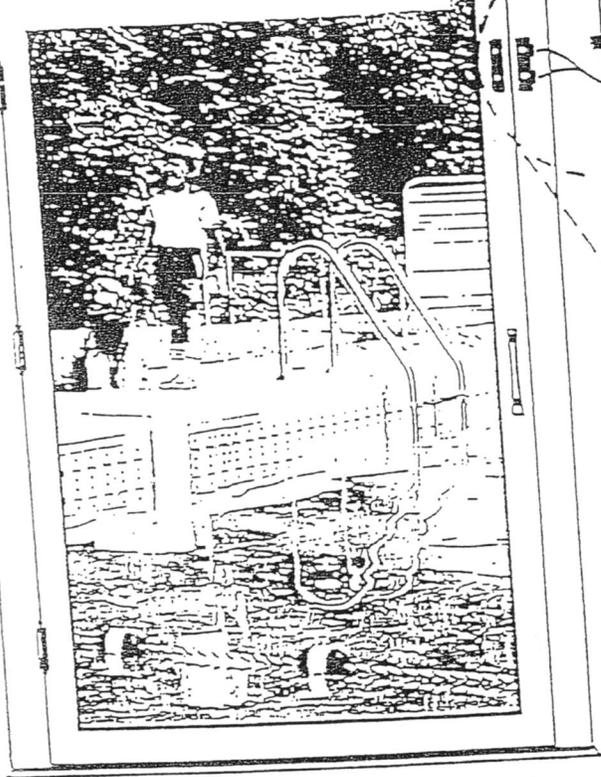

POOLGUARD DOOR ALARM

Poolguard Door Alarm mounts next to any door which gives easy access to your swimming pool. Any door which allows young children easy and quick access to a pool area is dangerous and should have a door alarm. The Poolguard Door Alarm comes with two magnetic switches, hookup wire, and operates on one 9-volt battery. The door alarm has a 15-second delay switch which allows an adult to pass through the door without the alarm sounding. If for any reason the door is accidentally left open the alarm will sound in 15 seconds and continue to sound until the door is shut. For further information contact your local Poolguard distributor or call PBM Industries toll free. When you think of pool safety/security, think of Poolguard.

- Important Safety Feature
- Complies With Model Barrier Codes
- Simple To Operate
- Automatic Reset
- Battery Powered
- Easy To Install
- Affordable Price
- Pass Through Feature For Adults

P.O. Box 658 • North Vernon, IN 47265 • (812) 346-2648

INCREASES POOL SAFETY

PRIVATE SWIMMING POOL BARRIER CONSTRUCTION

